



Stock & Crypto Price Display

By Encinitas 3D – www.Encinitas3D.com
Updated September 2025



Watch Setup Video

Welcome to Your New Stock & Crypto Price Display! Follow These Simple Steps to Quickly Set Up Your Device and Start Tracking Asset Prices in Real Time. If You Need Any Assistance During Setup, We're Here to Help!


- 600+ Crypto Pairs (e.g. BTCUSDT) are supported, full list at: <https://api.binance.us/api/v3/ticker/price>
- Thousands of USA Stocks Supported, Enter Using Prefix "Stock:" (e.g. Stock:aapl)

Step 1 – Plug In the Device

- Use The USB-C Plug on The Left of The Display
- Device Shows "To Setup Connect..." On The LCD

Step 2 – Connect To WIFI "SETUP PRICE TICKER"

- Using A Phone or Computer, Open Settings
- Navigate To the WIFI Settings Section
- Join The WIFI Named "SETUP PRICE TICKER"
- It May Take 10 Seconds to Connect and Launch the Portal
 - o If Portal Doesn't Open, Go To 192.168.4.1 In a Browser

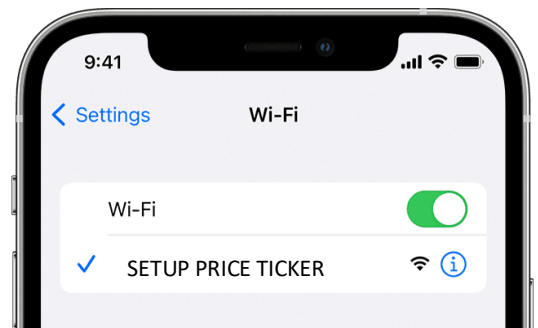

Step 2 - Join WIFI SETUP PRICE TICKER

Step 3 - Configure Wi-Fi and Optional Settings

- Once Launched, Click "Configure WIFI"
- Select your 2.4GHz WIFI **SSID Network** from The List
- Enter your WIFI **Password** in The Box
- Other Settings (Optional to Change)
 - o **Time Zone** (from -12 to 12 UTC Offset)
 - o **Language** (English-0, German-1, Spanish-2)
 - o Assets (Stock or Crypto) (can support from 1-25)
 - **Pair** Is the API Code from Binance
 - CRYPTO example: "ETHUSDT"
 - STOCK example: "Stock:nvda"
 - **Name:** Up to 8 characters
- Click **Save**, Allow a Moment to Connect



Step 3 - Once Portal Launches, Click "Configure Wifi"



Step 4 - Click Save. Device Will Connect to Your WIFI

Using the Device

- **Button A (Left):** Switches Through Your Configured Assets (E.G., BTC/TSLA). Press With **Button C** To Enable/Disable Cycling Through All Currencies Every 15 Seconds.
- **Button B (Middle):** Changes the LCD Brightness In 4 Levels. Hold Longer Than 1.5 Seconds to Turn on Auto Sleep after 45 Seconds.
- **Button C (Right):** Changes the Timeframes (9 Available From 1 Minute To 1 Month). Use **Button A** To Switch Down, Or **Button B** To Switch Up Through the Timeframes.
- **Red Side Button:** Press Twice to Turn Off the Device or Hold **Button C** For Over 1 Second.

To Reset the Device & Relaunch Setup Portal

- Press And Hold **Button B**
- While Holding **Button B**, Press and Release the **Red Side Button**
- Continue Holding **Button B** Until You See "Memory Cleared by User" On The LCD

Need Help? Email Us At Info@Encinitas3D.com